


RUFO -16,-18,-20,-25




Typ	Wydajność MAX	Spręż MAX	Wydajność nominalna V		Spręż nom. Δp_c	Głośność	Moc silnika	Ilość obrotów	Napięcie zasilania	Temp.
	[m ³ /h]	[Pa]	[m ³ /s]	[m ³ /h]	[Pa]	[dB]	[kW]	[obr./min]	[V]	[°C]
RUFO-16	510	270	0,158	300	150	68	0,060	2500	230	40
RUFO-18	1380	570	0,222	800	300	70	0,160	2500	230	40
RUFO-20 A	1230	550	0,200	700	300	69	0,140	2500	230	40
RUFO-20 B	2020	265	0,275	990	200	68	0,130	1300	230	40
RUFO-25 A	1880	570	0,277	1000	250	70	0,160	2500	230	40
RUFO-25 B	2230	265	0,333	1200	150	68	0,130	1300	230	40


Typ	Wymiary				
	D	D1	A	B	nxd
	[mm]	[mm]	[mm]	[mm]	[mm]
RUFO-16	160	185	330	230	8x7
RUFO-18	180	205	330	260	8x7
RUFO-20 A	200	225	330	355	8x7
RUFO-20 B	200	225	500	380	8x7
RUFO-25 A	250	275	330	355	8x7
RUFO-25 B	250	275	500	380	8x7

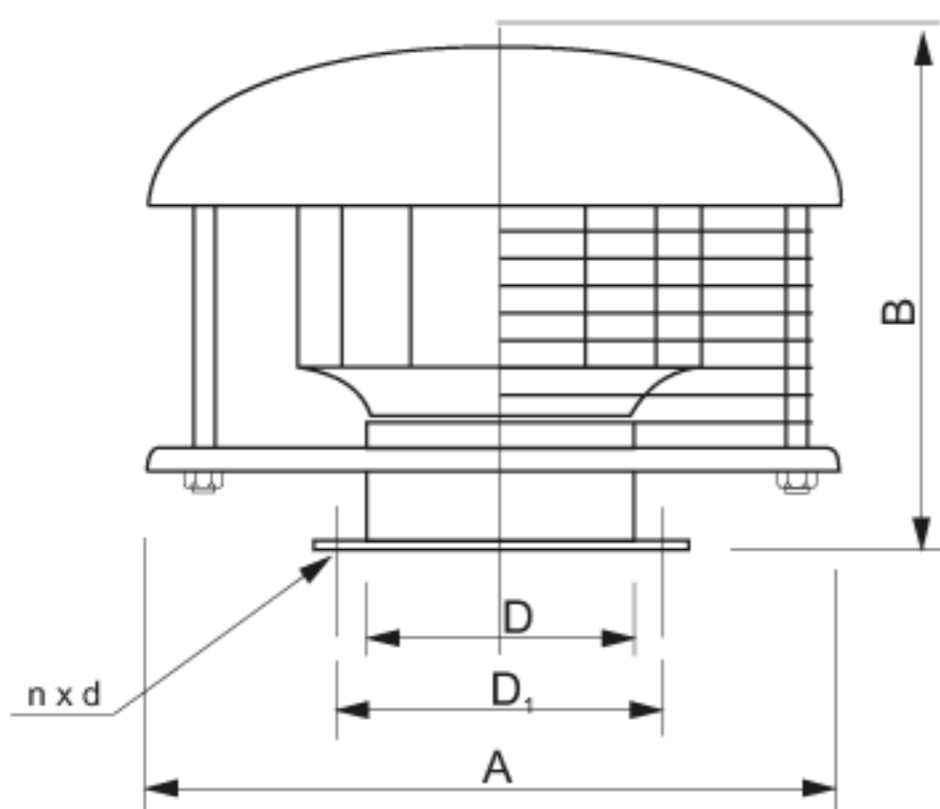


RUFO -16

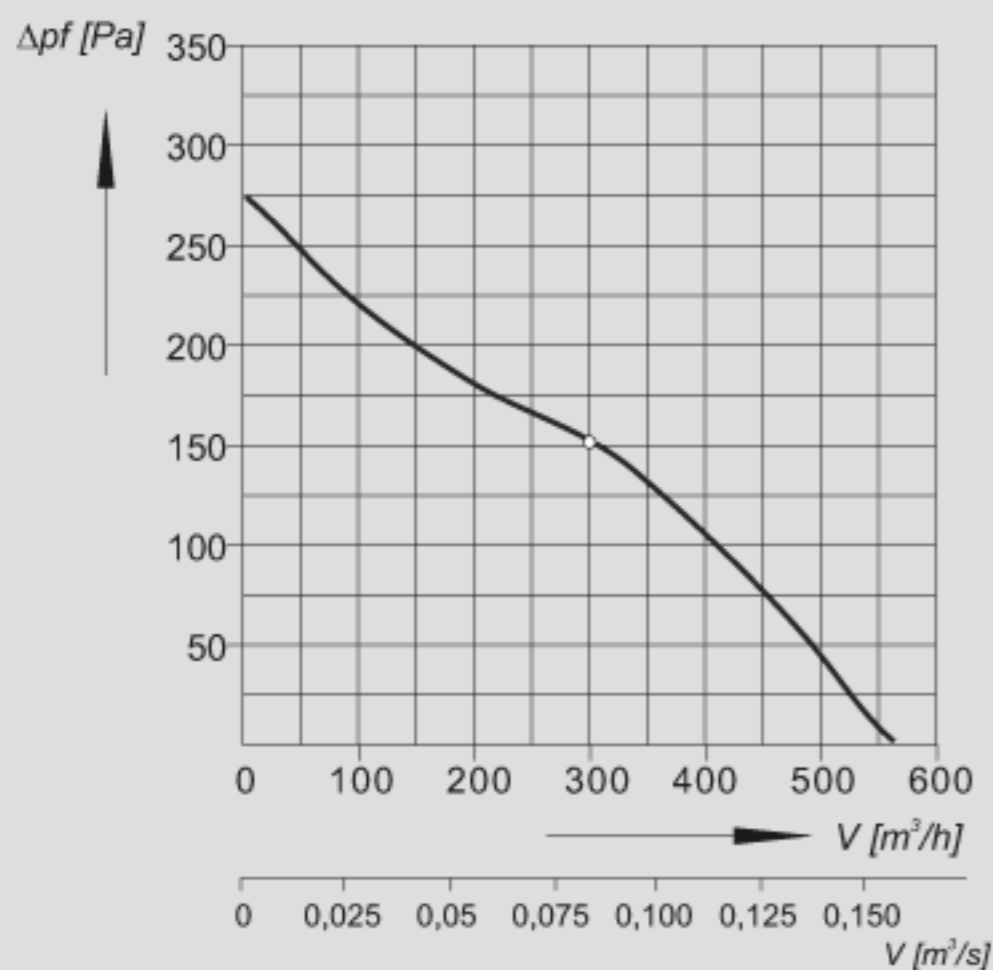


RUFO -18

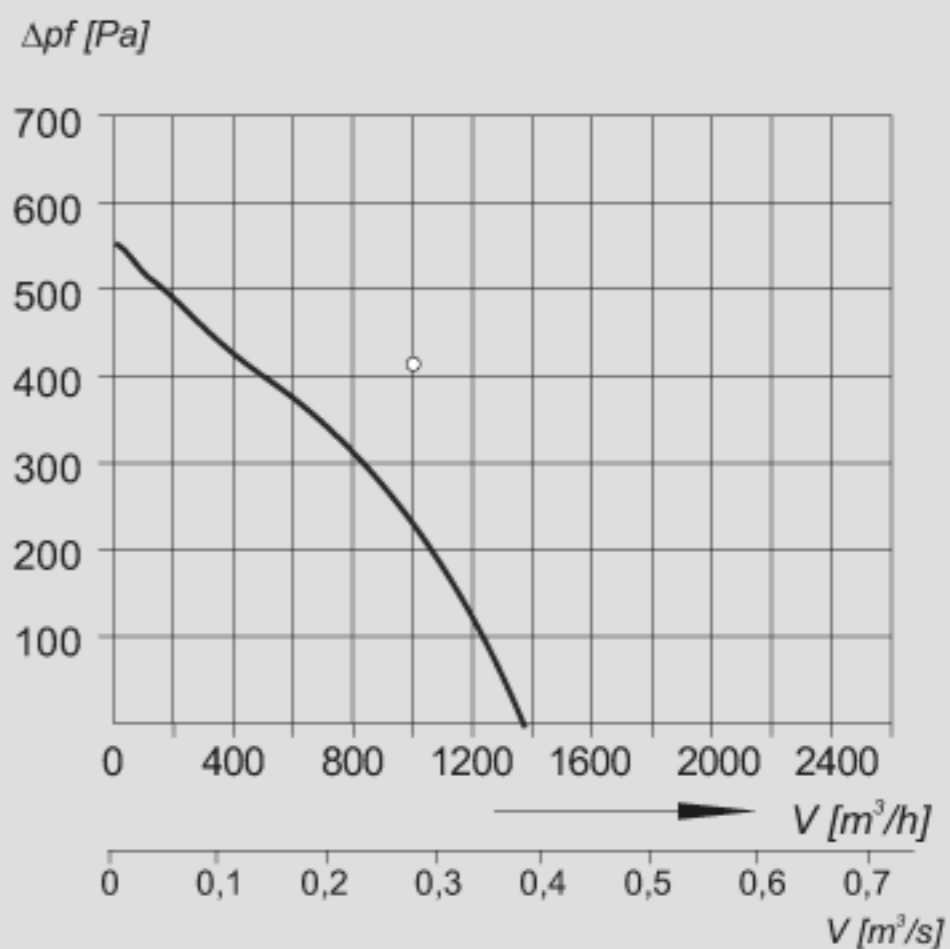

RUFO -20 A

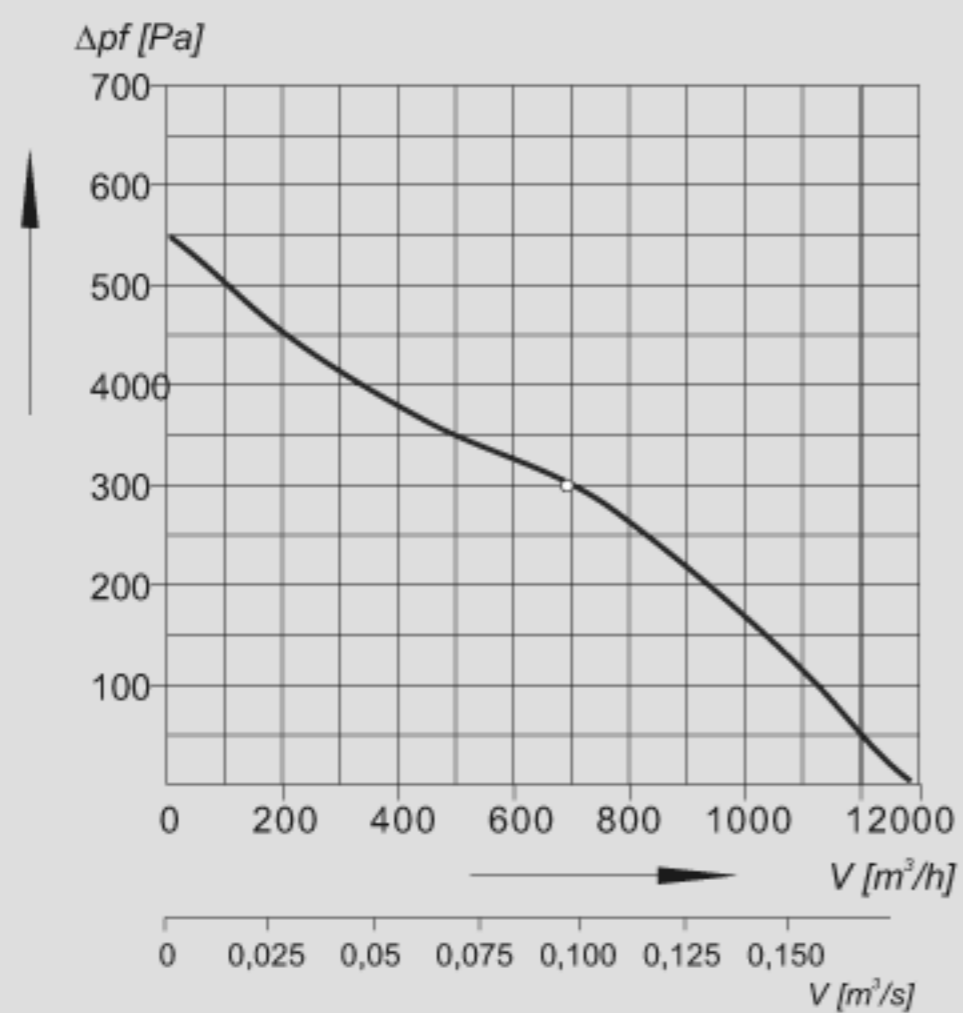

RUFO -20B

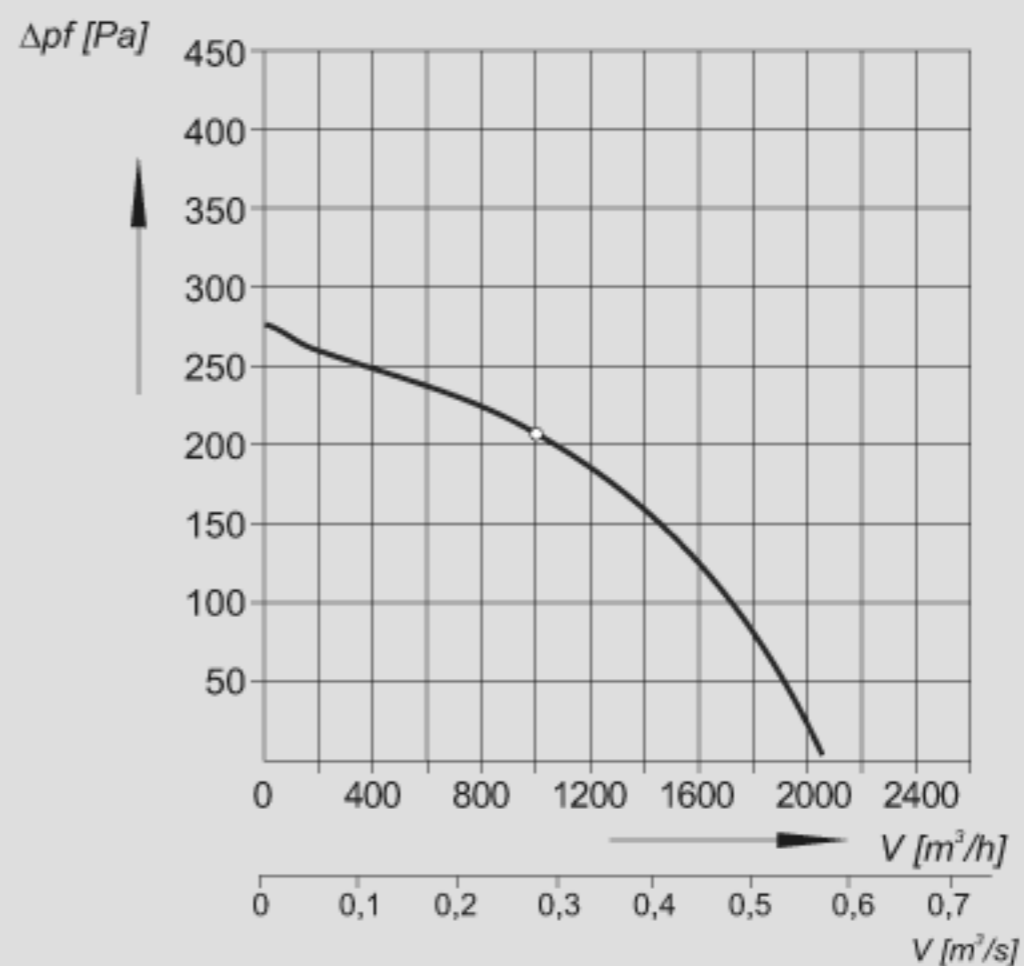

RUFO -25

